


PLAN

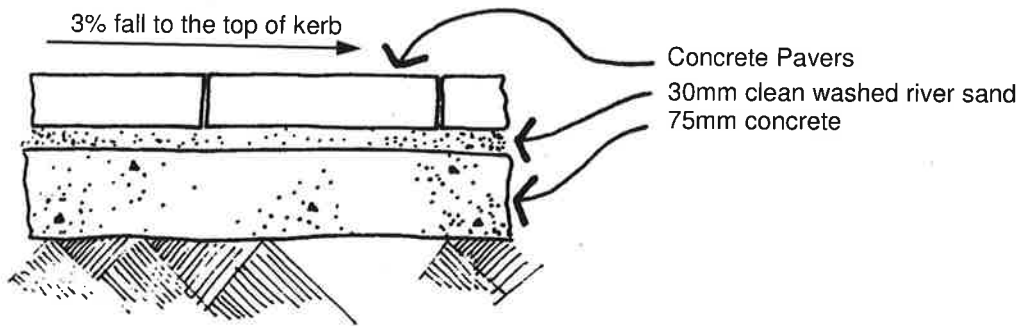

TYPICAL CROSS SECTION

**NOTES:**

1. Pavers shall be Boral 'Classic Pave-50' (previously Abbey Road) or approved equivalent (200mm x 100mm x 50mm) decorative concrete pavers. Double-header course perpendicular to the variation banding shall be placed at 15.0meter centres or at architectural/streetscape features. Colour specifications shall be as follows:
  - a) The Beach Region
    - i. Uniform Banding: Sahara
    - ii. Variation Banding: Charcoal
    - iii. Uniform Infill: Antique Copper
  - b) The Bush Region
    - i) Uniform Banding: Sahara
    - ii) Variation Banding: *to be determined*
    - iii) Uniform Infill: Antique Copper
2. Vehicle crossings to constructed using PLAIN CONCRETE in accordance with the issued levels and specifications
3. If the footpath paving works are approved with a development application and a condition requires either Council or an Accredited Certifier in Civil Works to certify the footpath paving construction, the following requirements apply:
  - a) Accredited Certifier in Civil Works - A Compliance Certificate shall be provided to Council on completion of works stating the footpath paving works have been constructed in accordance with all relevant development conditions and this specification.
  - b) Council - Minimum 48 hours notice of intention to place concrete given to the Development Engineer and **NO CONCRETE SHALL BE PLACED UNTIL THE FORMWORK HAS BEEN APPROVED AND INSPECTION NOTICE ISSUED** (Phone 9942 2111 8.30am – 5.00pm, Monday – Friday).
4. The subgrade shall be thoroughly compacted by the use of vibratory compaction equipment until it shows no signs of movement, or as directed by the certifying engineer.
5. Refer to Council Plan A4 7284 for Pedestrian kerb ramp and Council Plan A4 2276/A for kerbing and guttering details.

**Not to Scale. All Dimensions in Millimetres.**

NORTHERN BEACHES COUNCIL	Plan No.
<b>Standard Footpath Paving Detail Local Retail Centres</b>	<b>A4 10483</b>